


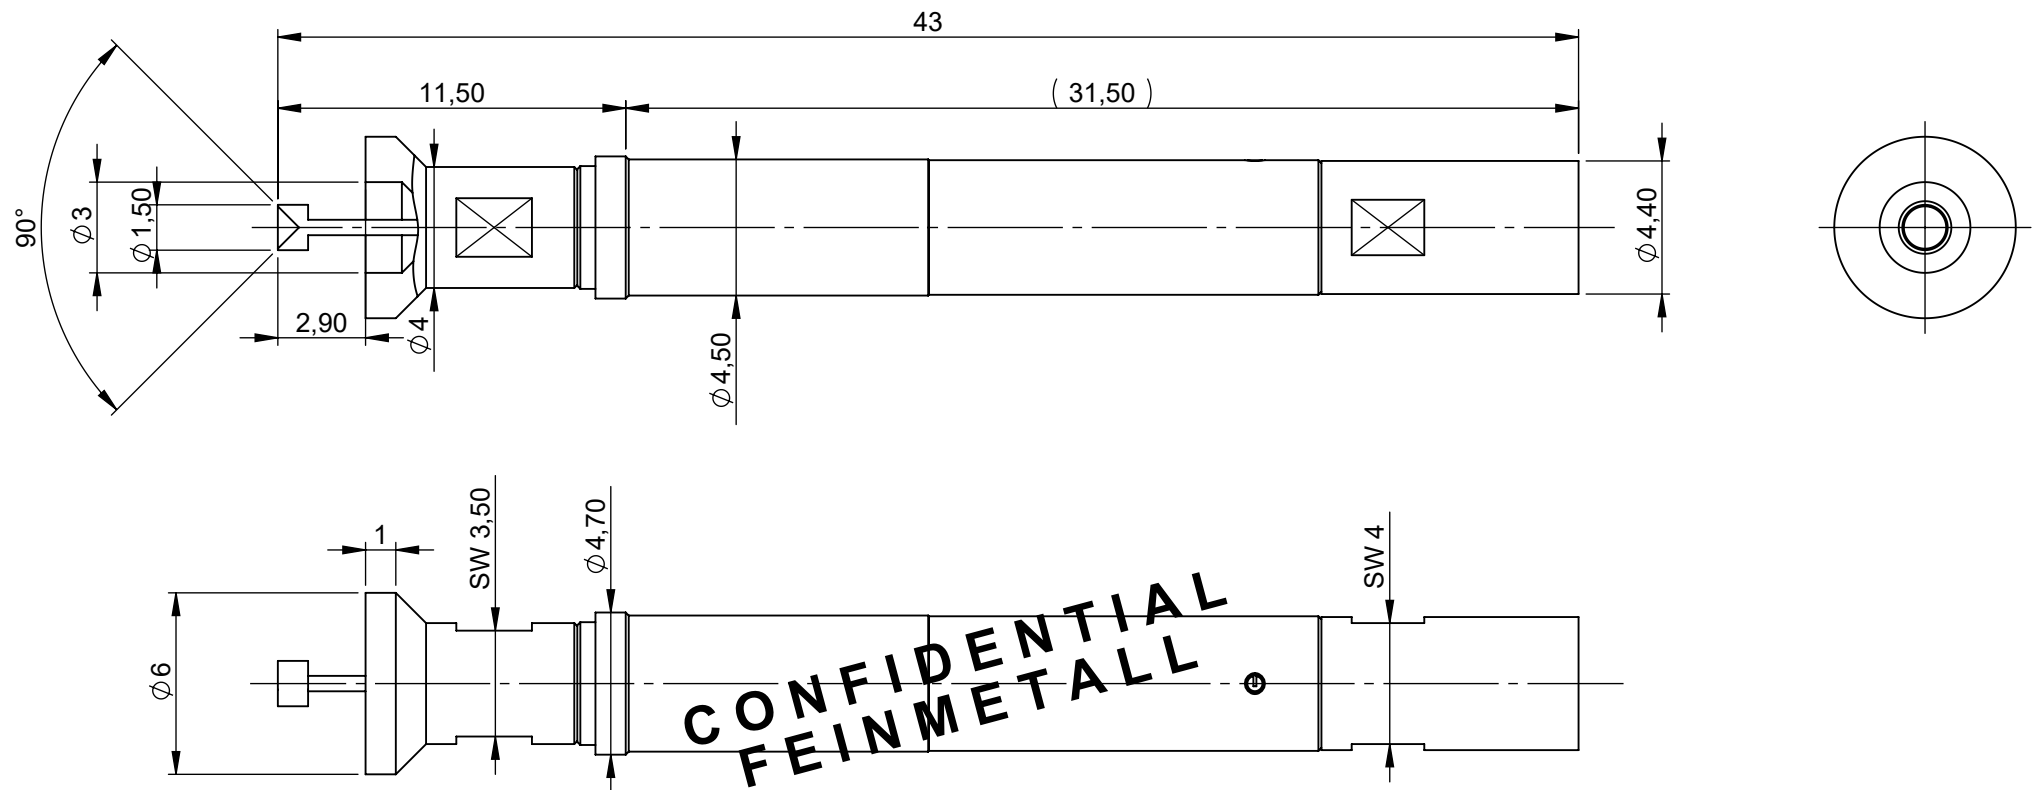


Bemerkungen/Notes:

Mechanische Spezifikationen/Mechanical Specifications

Ring contact:
Preload: 90cN
Nominal Force: 400cN $\pm 20\%$
Nominal Travel: 4.0mm
Maximum Travel: 5.0mm

Internal contact:
Preload: 75cN
Nominal Force: 130cN $\pm 20\%$
Nominal Travel: 2.0mm
Maximum Travel: 3.7mm



Maßstab/ Scale
1:1

Alle Maße sind in mm angegeben,
Measurements are given in mm

Product type				Material				Coating			
Assembly											
Insulation				PTFE				None			
Contact Head				Beryllium copper				Gold (Au)			
Spring Contact Probe											
ISO16016 NOTE, PROPRIETARY AND CONFIDENTIAL: Any information contained in this drawing is our sole property and is under copyright protection. It may be used exclusively in connection with a business relationship with us, and must neither be copied nor otherwise reproduced nor made available to third parties without our prior written permission. Any violation will give rise to damage claims and is a criminal offense. FEINMETALL GMBH											
						ISO 8015, ISO 2768-mH		Linear Dimensions < 0,5mm Radius and Chamfer < 0,5mm Angular Dimension < 10°		± 0,02mm ± 0,05mm ± 0,5°	
				Scale: 4:1		Material: Standard: Preliminary product:		Sheet: 1 of: 1			
								Coating: Surface: mm²			