

NEW




HSS 623 M

High Current Probe up to 100 A
Screw-in Test Probe

Grid:
≥ 7,60 mm
≥ 300 Mil


Installation height with KS: 10,8 mm (.425)
Recommended stroke: 4,4 mm (.173)

Mounting and functional dimensions

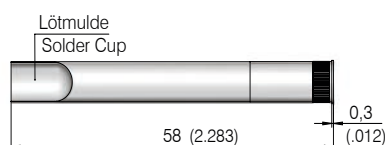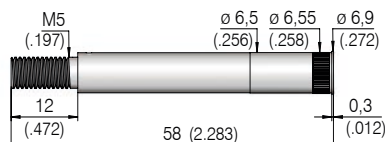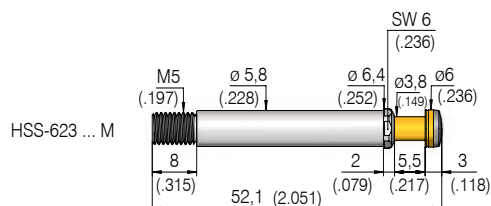

KS-623 M4 M5-R

KS-623 30 M5-R

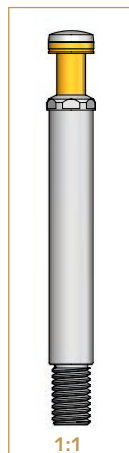

Available tip styles

Material	Tip style	Plating	Further versions	
			Ø	Ø (inch)
3	05*	S	Ø 6,00 (.236)	
3	06	A	Ø 6,00 (.236)	

* pressed-in silver stud

Materials

Plunger: BeCu, gold-plated or silver stud
Barrel: Brass, silver-plated
Spring: Stainless steel
Receptacle: Brass, gold-plated

Operating temperature

Standard: -100° up to +200° C

Mounting hole size



for KS-623 xx M5-R
in CEM1 and FR4: Ø 6,50 - 6,52 mm (.2559 - .2567)

Recommended tightening torque

HSS-623 M in KS-623: 40 cNm
Cable at KS-623: 4 Nm
Solder connection KS-623
for cable with wire cross section: ≤ 16 mm²


Electrical data

Current rating (at room temp.): max. 100 A
R_i typical: < 5 mΩ

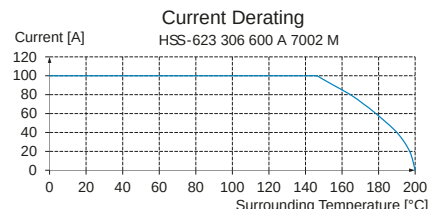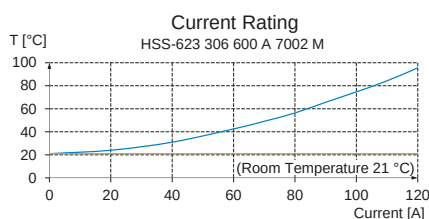

Mechanical data

Working stroke: 4,4 mm (.173)
Maximum stroke: 5,5 mm (.217)
Spring force at work. stroke: 7,0 N (25.2oz)
Alternative: 10,0 N (36oz); 15,0 N (54oz)

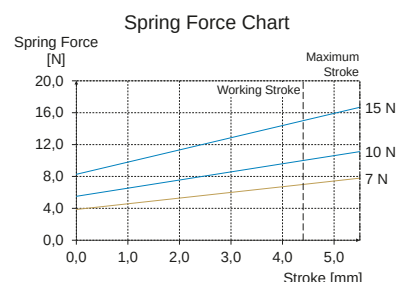

Ordering example

Series	Tip material	Tip style	Tip diameter (1/100 mm)	Plating	Spring force (dN)	Collar height (mm)	Type
	3 = BeCu			A = Gold S = Silver			
Test probe:	HSS	623	3	06	600	A	7002 M
Receptacles:	KS-623	M5 M5-R		KS-623	30	M5-R	