



P060-L010

0.70 mm / 28 mil Pitch | R<100 mOhm

Electrical specifications

Temperature [°C]	-45°...+100°
Current [A]	1
R TYP [mOhm]	<100

Mechanical specifications

Preload [cN]	15
Spring force [cN] at nt ±20%	35
Nominal travel [mm]	0.20
Maximum travel [mm]	0.22

Materials and plating


Plunger	BeCu	gold plated
Barrel	Bronze	gold plated
Spring	Spring steel	gold plated


Drill size recommendation (mm)

Equal barrel-Ø	0.59 - 0.61
----------------	-------------

Series drawing

All measurements are in mm.

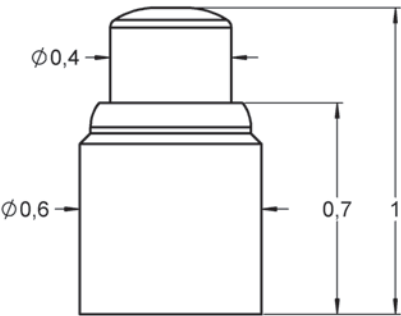

Order code	Product name	Tip Style	Material	Ø in mm	Plating	FM Choice
1111356	P06011B040G035L010	11 	B	0.40	G	-