



P162T-L160

2.54 mm / 100 mil Pitch | R<30 mOhm

Electrical specifications

Temperature [°C]	-45°...+200°
Current [A]	8
R TYP [mOhm]	<30

Mechanical specifications

Preload [cN]	100
Spring force [cN] at nt ±20%	250
Nominal travel [mm]	2.8
Maximum travel [mm]	3.0

Materials and plating


Plunger	Brass	gold plated
Barrel	Brass	gold plated
Spring	Stainless steel	unplated

Drill size recommendation (mm)

Equal barrel-Ø	1.60 - 1.62
----------------	-------------

Series drawing

All measurements are in mm.

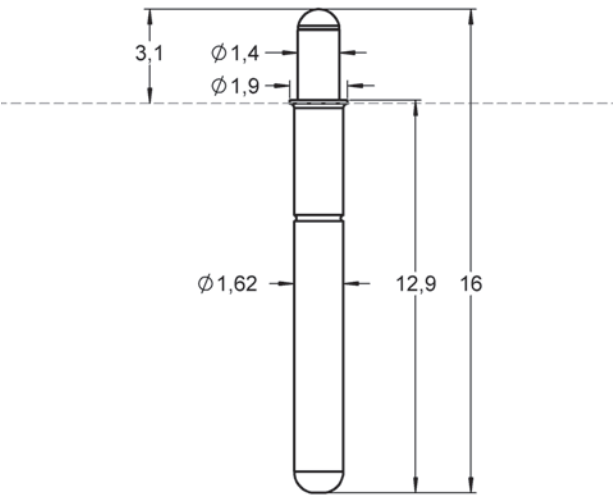

Order code	Product name	Tip Style	Material	Ø in mm	Plating	FM Choice
1014080	P16211M140G250TL160H	11 	M	1.40	G	