



Pogo Connectors

P26512B230G080TL150ST

Order code 1018229

General

Design	Basic Contact Probe
Family	P-T / P265T-L150
Pitch [mm/mil]	4.00 / 157
Temperature [C°]	-45°C...+200°C

Electrical specifications

Continuous current [A]	10.00
Typical contact resistance [mOhm]	100.00

Mechanical specifications

Preload [cN]	40.00
Spring force [cN]	80.00
Nominal travel [mm]	2.80
Maximum travel [mm]	3.50
Pointing accuracy +/- [mm]	0.10

Dimensions

Total length [mm]	15.00
Projection height [mm]	7.10
Tip style diameter [mm]	2.30
Barrel diameter [mm]	2.65
Collar diameter [mm]	3.20
Press ring diameter [mm]	3.20

Materials & surfaces


Tip style	12
Plunger material	Beryllium copper
Plunger plating	Gold
Barrel material	Brass
Barrel plating	Gold
Spring material	High-grade steel
Spring plating	Uncoated

Accessories

Other	1131050-HP265LA
-------	-----------------

Family drawing

All measurements are in mm.

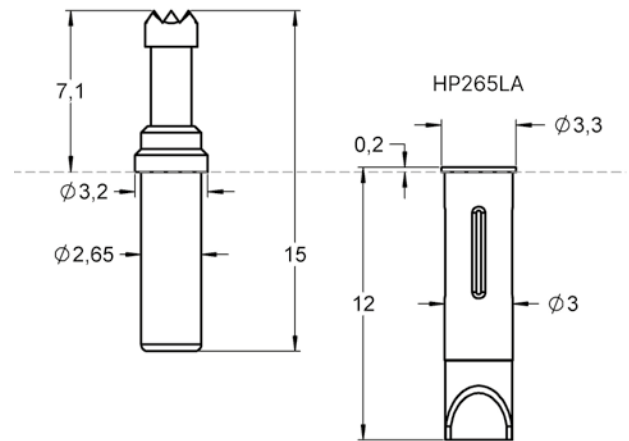

Tip style 1

