



P410M-L104

6.00 mm / 236 mil Pitch |
R<30 mOhm | Solder tight

Electrical specifications

Temperature [°C]	-45°...+200°
Current [A]	10
R TYP [mOhm]	<30

Mechanical specifications

Preload [cN]	150
Spring force [cN] at nt ±20%	300
Nominal travel [mm]	1.6
Maximum travel [mm]	2.4

Materials and plating


Plunger	Brass	gold plated
Barrel	Brass	gold plated
Spring	Stainless steel	gold plated

Drill size recommendation (mm)

Equal barrel-Ø	4.07 - 4.08
----------------	-------------

Series drawing

All measurements are in mm.

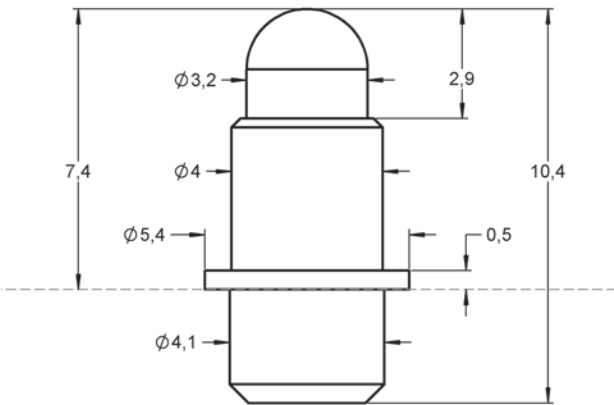

Order code	Product name	Tip Style	Material	Ø in mm	Plating	FM Choice
1031194	P41011M320G300ML104ST	11 	M	3.20	G	