
RSS-100 Series

0.100 (2.54) Centers


For SS/GSS Series Probes see pg. 3

Part Number	Style/Termination	Receptacle or Terminal Length	Probe/Receptacle Combined Length	Notes
RSS-100-CR	Crimp	0.475 (12.07)	0.550 (13.97)(1)	—
RSS-100-NT	No Tail	0.402 (10.21)	0.462 (11.73)(1)	—
RSS-100-RP	Round Post	0.625 (15.88)	0.685 (17.40)(1)	0.220 post length – 0.028 dia.
RSS-100-WW	Wire Wrap	0.822 (20.88)	0.882 (22.40)(1)	0.420 post length – 0.025 dia.
RSS-100-PW-12-1	Preattached Wire(2)	0.475 (12.07)	0.550 (13.97)(1)	12" wire length, 1" strip length
RSS-100-PW-36-1	Preattached Wire(2)	0.475 (12.07)	0.550 (13.97)(1)	36" wire length, 1" strip length


RSS-100-CR

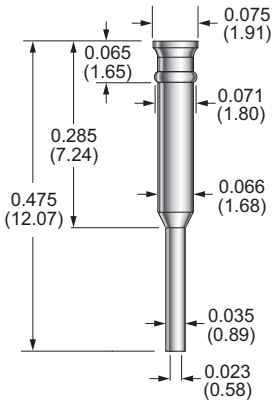

RSS-100-NT




Probe Extension




See chart for head length

TIP	HEAD LENGTH	TIP	HEAD LENGTH
1	0.040 (1.02)	10	0.028 (0.71)
2	0.028 (0.71)	11	0.040 (1.02)
3	0.028 (0.71)	18	0.060 (1.52)
4	0.040 (1.02)	19	0.055 (1.40)
5	0.080 (2.03)		

RSS-100-RP

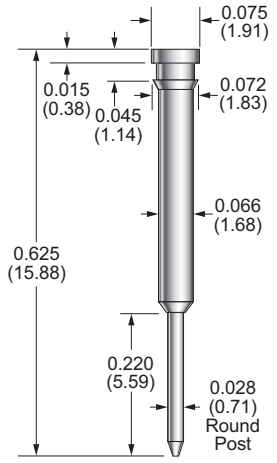

RSS-100-WW

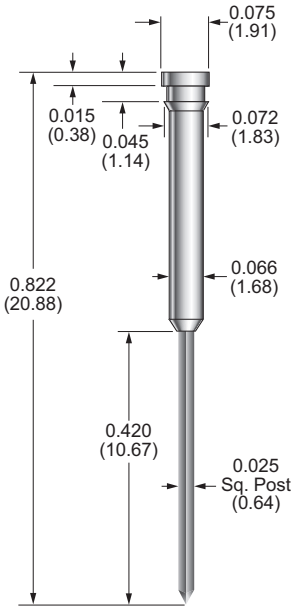

Probe Specifications

Minimum Centers	0.100 (2.54)
Drill Size	#50
Mounting Hole Size	0.068/0.070 (1.73/1.78)
Recommended Wire	28-30 gage
Materials	Nickel/silver

Tools

Crimping Pliers	CP-SS-100 *(for 28-30 gage solid conductor)*
Insertion Tool	RT-SS-100

How to Order

RSS - 100 - WW - G

1 2 3 4

1 Series	RSS			
2 Size	100			
3 Termination	CR	Crimp	NT	No tail
	RP	Round post	WW	Wire wrap
	PW-12-1	Preattached wire 12", 1" strip length(1)		
	PW-36-1	Preattached wire 36", 1" strip length(1)		
4 Plating Options	G	Gold		

1. Plus head length per tip style – see chart
2. Wire length 36" with a 1" strip length, 12" & 36" standard, blue solid conductor Kynar wire