


Grid:
≥ 2,54 mm
≥ 100 Mil

Installation height with KS: 10,2 mm (.402)


Switch path: 1,5 mm (.059)

Mounting and functional dimensions


SKS-215

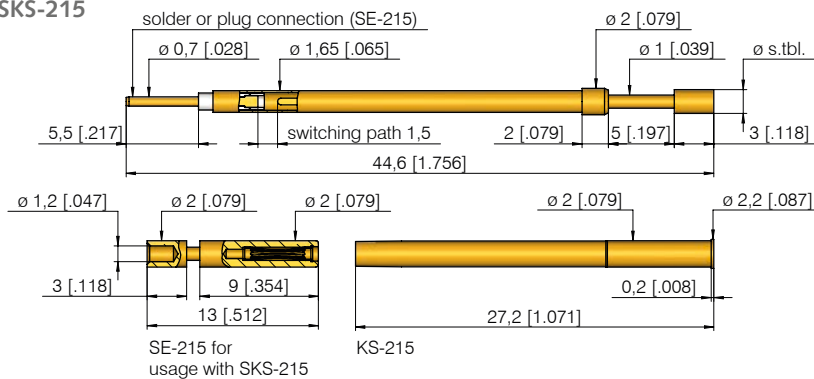

SKS-215 ... E

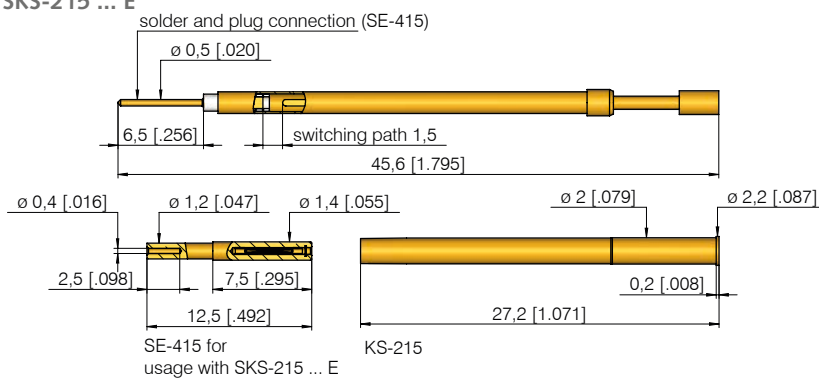

Quick-exchange system for SKS-215 ... E

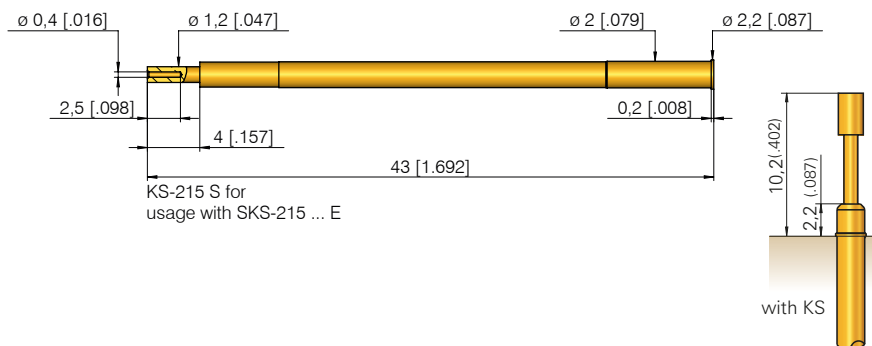

Available tip styles

Material	Tip style	Plating	Further versions	
			Ø	Ø (inch)
0 02		A		
3 02		A	1,00	(.039)
3 03		A		
3 05		A	0,80	(.031)
3 05		A		
3 06		N	1,50 2,00 2,30	(.059) (.079) (.091)
3 19		A		

Collar height and installation height

The installation height of the tip (dimension without KS) is determined by the collar height.

Collar height	Installation height without receptacle
02	10,0 mm (.394)

Warning:

Do not solder the cable to the crimp points of the receptacle.

The KS-215 S receptacle enables easy exchange of switching probes without removing the wiring connection. This receptacle can only be used with SKS-215 ... E.

Note:

Screw-in version see SKS-215 M shown on page 109.

Mechanical data

Switch path: 1,5 mm (.059) ± 0,2 (.008)
 Recomm. working stroke: 4,0 mm (.157)
 Maximum stroke: 5,0 mm (.197)
 Spring force: 0,8 / 1,5 / 3,0 N
 Spring force at switch point: 0,23 N (0.8oz);
 0,45 N (1.6oz); 0,9 N (3.2oz)
 Spring force at work. stroke: 0,8 N (2.9oz);
 1,5 N (5.4oz); 3,0 N (10.8oz)

Materials

Plunger: BeCu, gold- or nickel-plated
 (or gold-plated with)
 Barrel: Brass, gold-plated
 Spring: Steel, gold-plated
 Receptacle: Brass, gold-plated
 Contact terminal: Brass, gold-plated
 Isolated Part: Peek

Mounting hole size

with receptacle:

in CEM1:

Ø 1,98 - 2,00 mm
 (.078 - .079)

in FR4:

Ø 1,99 - 2,01 mm
 (.078 - .079)

without receptacle:

Ø 1,65 mm (.065)

Electrical data

Current rating: 3 A
 (see page 100)

Operating temperature

Standard: -40° up to +80° C

Ordering example

	Series	Tip material 0 = Delrin 3 = BeCu	Tip style	Tip diameter (1/100 mm)	Plating A = Gold N = Nickel	Spring force at working stroke (dN)	Collar height (mm)	Type (alternative E)
Test probe:	SKS	2	1	5	3	0	2	1
Receptacle:	KS-215	KS-215	S					
Lamellar plug:	SE-215	SE-415						

All specifications are subject to change without prior notification