

SKS 415

Switching Probe
Closing version (NO)

Grid:


≥ 3,50 mm

≥ 140 Mil

Installation height with KS: 10,4 - 24,9 mm (.409 - .980)

Switch path: 1,7 mm (.067)

Mounting and functional dimensions

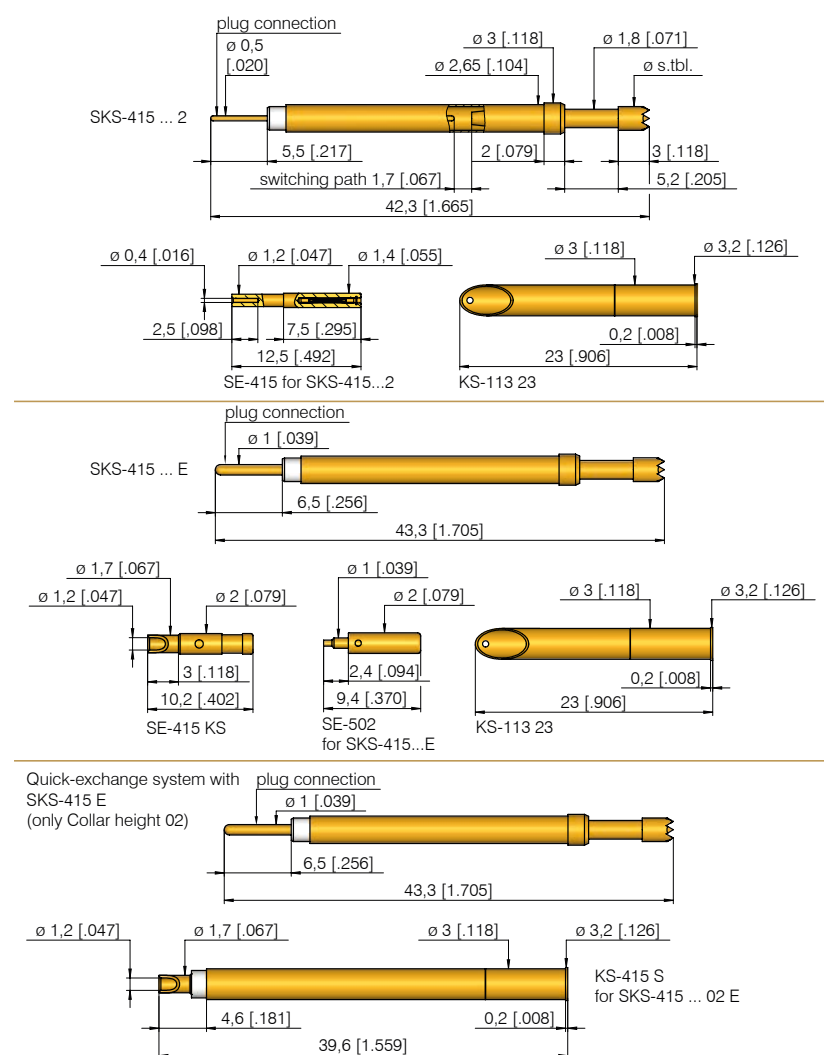

Collar height	Installation height without KS with tip style 02/03/06	Installation height without KS with tip style 53/56
02	10,2 mm (.402)	16,7 mm (.657)
05**	13,2 mm (.520)	19,7 mm (.776)
10**	18,2 mm (.717)	24,7 mm (.972)

** not usable with KS-415 S

Mechanical data

Switch path: 1,7 mm (.067) ± 0,2 (.008)
 Recomm. working stroke: 4,2 mm (.165)
 Maximum stroke: 5,2 mm (.205)
 Spring force at switch point: 0,9 N (3.2oz)
 Spring force at working stroke: 2,3 N (8.3oz)

Electrical data

Current rating: 5 A
 (see page 100)

Materials

Plunger: BeCu, gold-plated
 (or gold-plated with insulator cap)
 Barrel: Brass, gold-plated
 Spring: Steel, gold-plated
 Receptacle: Brass, gold-plated
 Isolated Part: Peek

Operating temperature

Standard: -40° up to +80° C

Available tip styles

Material	Tip style	Plating	Further versions	
			ϕ	ϕ (inch)
0 02		A	5,00 2,30	(.197) (.091)
3 02		A		
3 02		A		
3 03		A		
3 06		A		
3 06		A		
3 06		A	4,00	(.157)
3 19		A		
3 53*		A		
3 56*		A		
3 56*		A		
3 56*		A		

* Tip length 9,5 mm (.374)
 Total length 6,5 mm (.256) longer than standard tip styles

Mounting hole size

with receptacle: ϕ 2,98 - 2,99 mm
 (.1173 - .1177)

without receptacle: ϕ 2,65 mm (.1043)

Collar height and installation height

To adjust the installation height (dimension without KS) test probes with different collar heights are available.

Note:

The receptacle can be used from grid size 4,50 mm (180 Mil) upwards.

Screw-in version:

see SKS-465 MF and SKS-465 SF shown on page 110 and 112.
 The KS-415 S receptacle enables easy changing of the SKS-415 E (only collar height 02) switching probe without removing the wiring connection.

Ordering example

	Series	Tip material 0 = Delrin 3 = BeCu	Tip style	Tip diameter (1/100 mm)	Plating A = Gold	Spring force at working stroke (dN)	Collar height (mm)	Type (alternative E)
Test probe:	SKS	4	15	3	06	230	A	23
Receptacle:	KS-113	23	KS-415	S				
Lamellar plugs:	SE-415	SE-502	SE-415	KS				