



Available Tip Styles

Material	Tip Style	ø mm
B	A 	2,30
B P	F 	2,30 3,00
B	H 	2,30 3,00

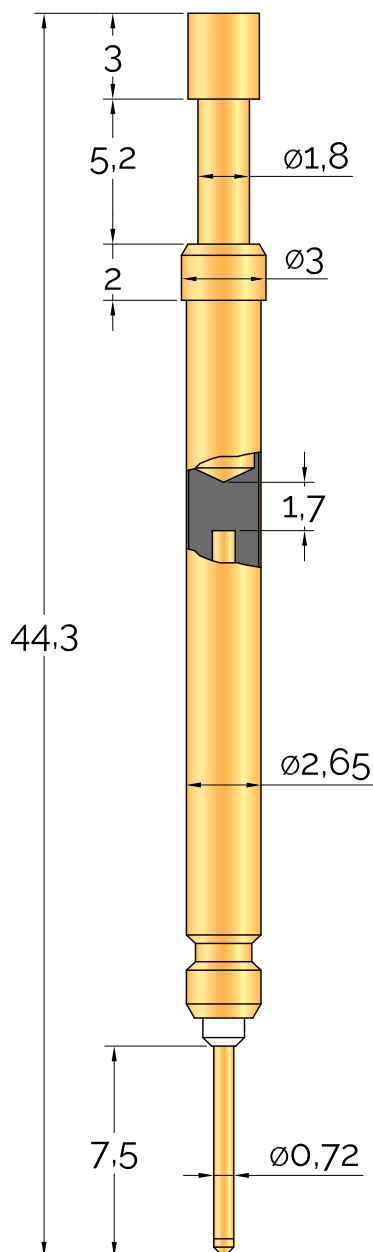

Technical Data

Recommended minimum centers:	3,50 mm
Recommended working travel:	4,20 mm
Maximum travel:	5,20 mm
Current rating:	5,0 A
Typical contact resistance:	<50 m Ω
Operating temperature standard:	-100° up to +200°

Materials

Plunger:	BeCu, nickel or gold plated
Barrel:	Brass, gold plated
Spring:	Music wire, gold plated
Receptacle:	Brass, gold plated

Spring Force (g $\pm 20\%$)

Preload:	60 g
Spring force:	200 g
Alternative:	300 g

Hole size without receptacle

Drills:	ø2,65
---------	-------

Hole size with receptacle

Drills:	ø2,99
---------	-------

Ordering example:

Series	Tip ø mm	Spring Force	Material	Plating
SP 415	F	230	B	G
	Tip Style		B= BeCu S= Steel P= Plastic	G= Gold N= Nickel

