

High Current Probes

TS300TYPK200

Order code 1033232



General

Design	Basic Contact Probe
Family	TS300
Pitch [mm/mil]	5.00 / 197
Temperature [C°]	-45°C...+200°C

Mechanical specifications

Preload [cN]	70.00
Spring force [cN]	200.00
Nominal travel [mm]	3.00
Maximum travel [mm]	4.00

Dimensions


Total length [mm]	22.70
Projection height [mm]	6.00
Tip style diameter [mm]	3.00
Barrel diameter [mm]	4.15
Collar diameter [mm]	4.50

Materials & surfaces

Tip style	17
Plunger material	Steel
Plunger plating	Uncoated
Barrel material	Plastic
Barrel plating	Uncoated
Spring material	High-grade steel
Spring plating	Uncoated

Family drawing

All measurements are in mm.

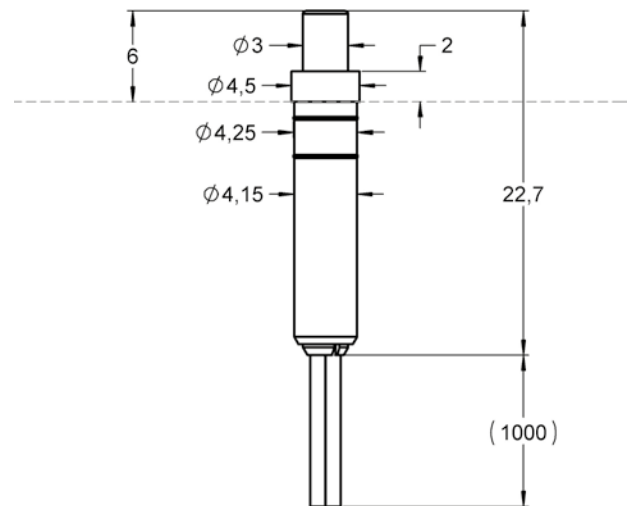

Tip style 1

