



Basic Threaded Probes

F73117B150G150

Order code 1004971

General

Design	Basic Contact Probe
Family	F731
Pitch [mm/mil]	2.40 / 94
Temperature [C°]	-45°C...+100°C

Electrical specifications

Continuous current [A]	5.00
Typical contact resistance [mOhm]	30.00

Mechanical specifications

Preload [cN]	50.00
Spring force [cN]	150.00
Nominal travel [mm]	3.50
Maximum travel [mm]	4.40
Pointing accuracy +/- [mm]	0.08
Thread	M1.4
Tool size [mm]	1.4

Dimensions


Total length [mm]	27.90
Projection height [mm]	9.40
Tip style diameter [mm]	1.50
Barrel diameter [mm]	1.37
Collar diameter [mm]	1.85
Press ring diameter [mm]	1.85

Materials & surfaces

Tip style	17
Plunger material	Beryllium copper
Plunger plating	Gold
Barrel material	Brass
Barrel plating	Gold
Spring material	Spring steel
Spring plating	Silver

Family drawing

All measurements are in mm.

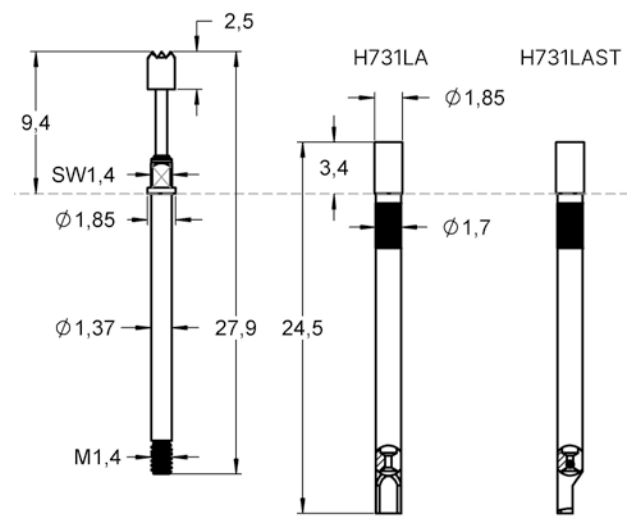

Accessories

Tool for receptacle	FEWZ-100E0
Tool for probe	1004487-FWZ731S1, 1029810-FWZ731S1T
Other	1001844-H731LA

Tip style 1

